


STA20

Quick Fit Sliding Door Retro-Fit Kit

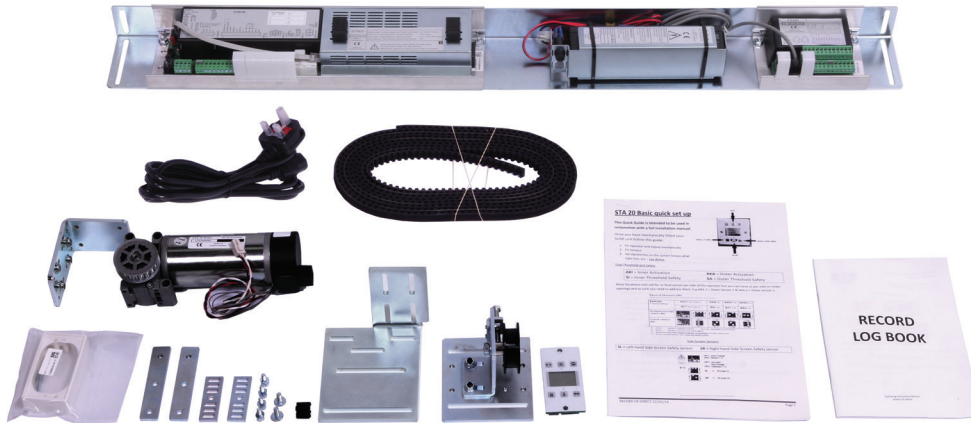

The Record STA 20 is the perfect solution to renew outdated or faulty existing sliding door equipment. Why replace one costly component when for a more economical solution you can replace all of the major components whilst reusing the housing and wheels with a STA 20 retrofit kit. Complete with a 12 month warranty, this retrofit kit will keep your customers' doors going for longer.

Applications

Especially suitable for offices, retail outlets, care homes, hospital wards, educational facilities, libraries, restaurants, and hotels.

Key benefits

- » Upgrade obsolete or un-economical sliding operators FAST
- » Order kits by manufacturer and model to ensure you get the right kit for the right operator, saving valuable time and money.
- » Bespoke brackets to match the existing operator for easy fitting.
- » No need to drill and tap with our product specific bracketry.
- » Most installations are achieved in under 3 hours including wiring and set-up.
- » Only one engineer required for installation
- » Everything comes complete in bespoke packaging for its safety and your peace of mind during transport.



STA20

Quick Fit Sliding Door Retro-Fit Kit



Key features

- » All equipment mounted on a single easy to fit module
- » Motor conversion bracket allows fitting an STA 20 motor in place of a standard "Dunkermotor".
- » Control, fem-0 board, battery, motor, belt and BDE-D – all in one box.
- » Operator specific kits – including a universal kit that will fit 90% of all sliding door operators.
- » Instructions included
- » UK mains lead

Specifications

Max. opening speed	0.7m/s (adjustable)
Max. closing speed	0.7m/s (mass-dependent adjustable)
Hold-open time, day:	0–30 s (adjustable) adjustable time until the door closes
Mains power connection	230 VAC, 50 Hz
Protection rating	For use in dry locations only
Power consumption	100W max, 20W idle mode
Ambient temperature	–15°C to +50°C
Frame size	STD: 160mmH x 166mmD LP: 110mmH x 166mmD

Recommended application limits: Standard sliding door

Door type	Single (two leaves)	Bi-part (four leaves)
Opening width	800-3000 mm	800-3000 mm
Clear passage height	3000 mm	3000 mm
STD max. door weight	1x 150 kg	2 x 120 kg
DUO max. door weight	1 x 200 kg	2 x 150 kg

Please note - most retrofit kits will be a maximum of 120kgs per door leaf, unless duo which is 150kgs per door

Our STA 20 retro-fit kits are compatible with the following operators

Besam EMD	Jmd SILENT SLIDE
Besam EMC	Horton 2003 / 2001
Besam EML	Portalp Diva
Besam EMDE	record STA 13
Besam EMJ	record STA 14
Besam EMD v9	record STA 16
Besam UNISLIDE / EMSL	record STA 17
Besam SL500	Stanley DURAGLIDE 2000
Ditec Bis O	Stanley DURAGLIDE J
Ditec BIS V	Tormax TEP
Dom ASTROSLIDE 2000	Tormax TMP
Dorma ES60	Tormax TXP
Dorma ES70	Tormax TLP
Dorma ES90	Tormax 2201 Windrive
Dorma ES200	Universal Kit
Geze TSA 350 N	Waldoor UWS 2400
Gilgen SLM (old)	

Further retro-fit kits are always being developed. Please contact your Regional Account Manger if your operator is not listed

Sensors & Signage Package includes:

Single

Retro-Fit Kit, 2 x RIC290, AIS290, signage: 1 x automatic door (double sided) and 1 x keep clear.

Double

Retro-Fit Kit, 2 x RIC290, 2 x AIS290, signage: 2 x automatic door (double sided) and 2 x keep clear.

Full Equipment Package includes:

Single 3000 mm

Retro-Fit Kit, 2 x RIC290, AIS290, signage: 2 x automatic door (double sided) and 1 x keep clear, adjustable floor guide, length of channel to suit, morning entry key switch and stainless steel back box to suit.

Double

Retro-Fit Kit, 2 x RIC290, 2 x AIS290, signage: 2 x automatic door (double sided) and 2 x keep clear, 2 x adjustable floor guide, 2 lengths of channel to suit, morning entry key switch and stainless steel back box to suit.

We have a range of retro-fit kits designed to upgrade obsolete or un-economical sliding operators FAST.



Scan here for more product information